

# **kboot**

## **A Boot Loader Based on Kexec**

<http://kboot.sourceforge.net/>

Werner Almesberger  
werner@almesberger.net


January 18, 2007

# Why another boot loader ?

- Current boot loaders on Linux are feature-poor
  - Limited diagnostics and repair
  - Only support selected hardware
  - Cannot read all storage arrangements (file systems, RAID, etc.)
- Modern hardware tends to do more in software  
E.g., USB, Firewire, iSCSI
- Adding new features is hard
  - LILO: lots of assembler ...
  - GRUB: in C, but has its own world
- We can do better now


# Requirements

How to handle all these requirements ...

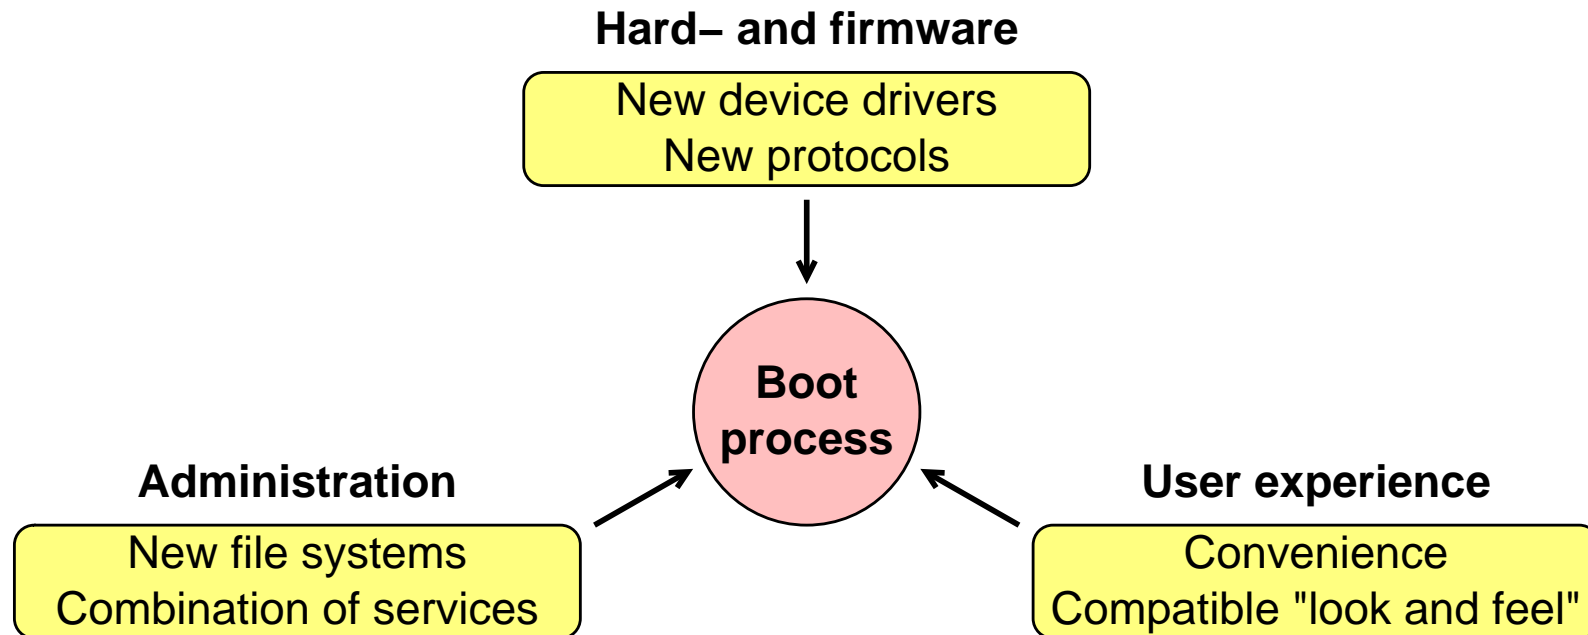

... without working up a sweat ?


# Where to add features ?

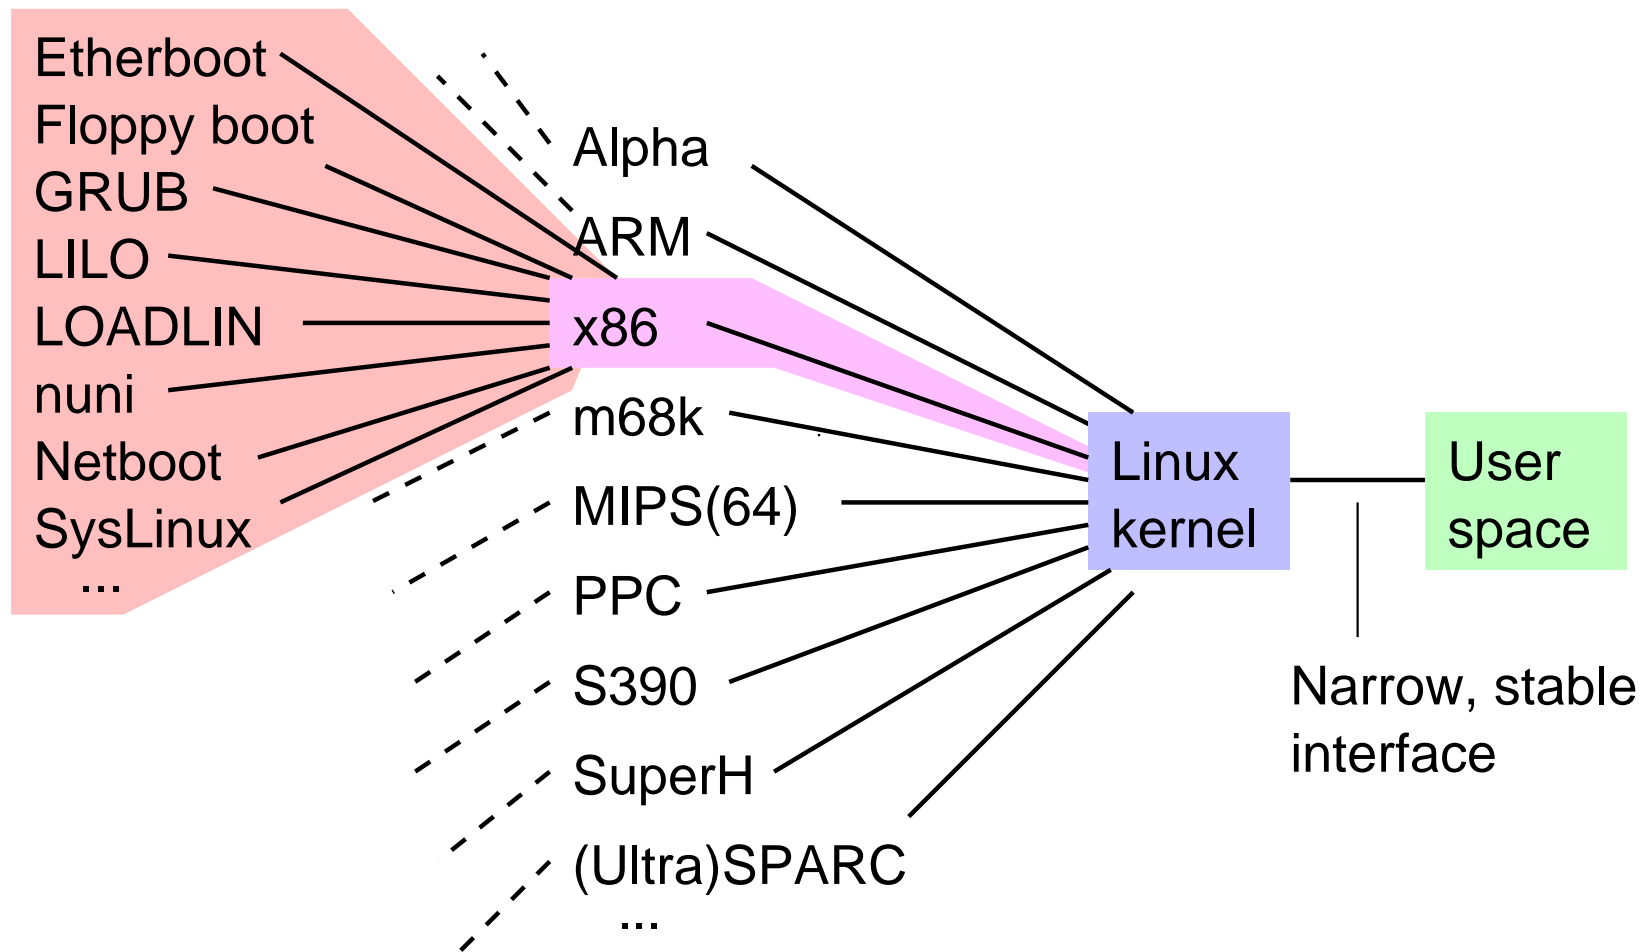


# The Linux system

- Can reach (almost) all places where we want to put stuff (Kernel image, initramfs, etc.)
  - Complete set of recovery tools
  - Well-known user interface(s)
  - Maintenance is somebody else's problem
- ⇒ It's the perfect boot loader

# Heavy code reuse

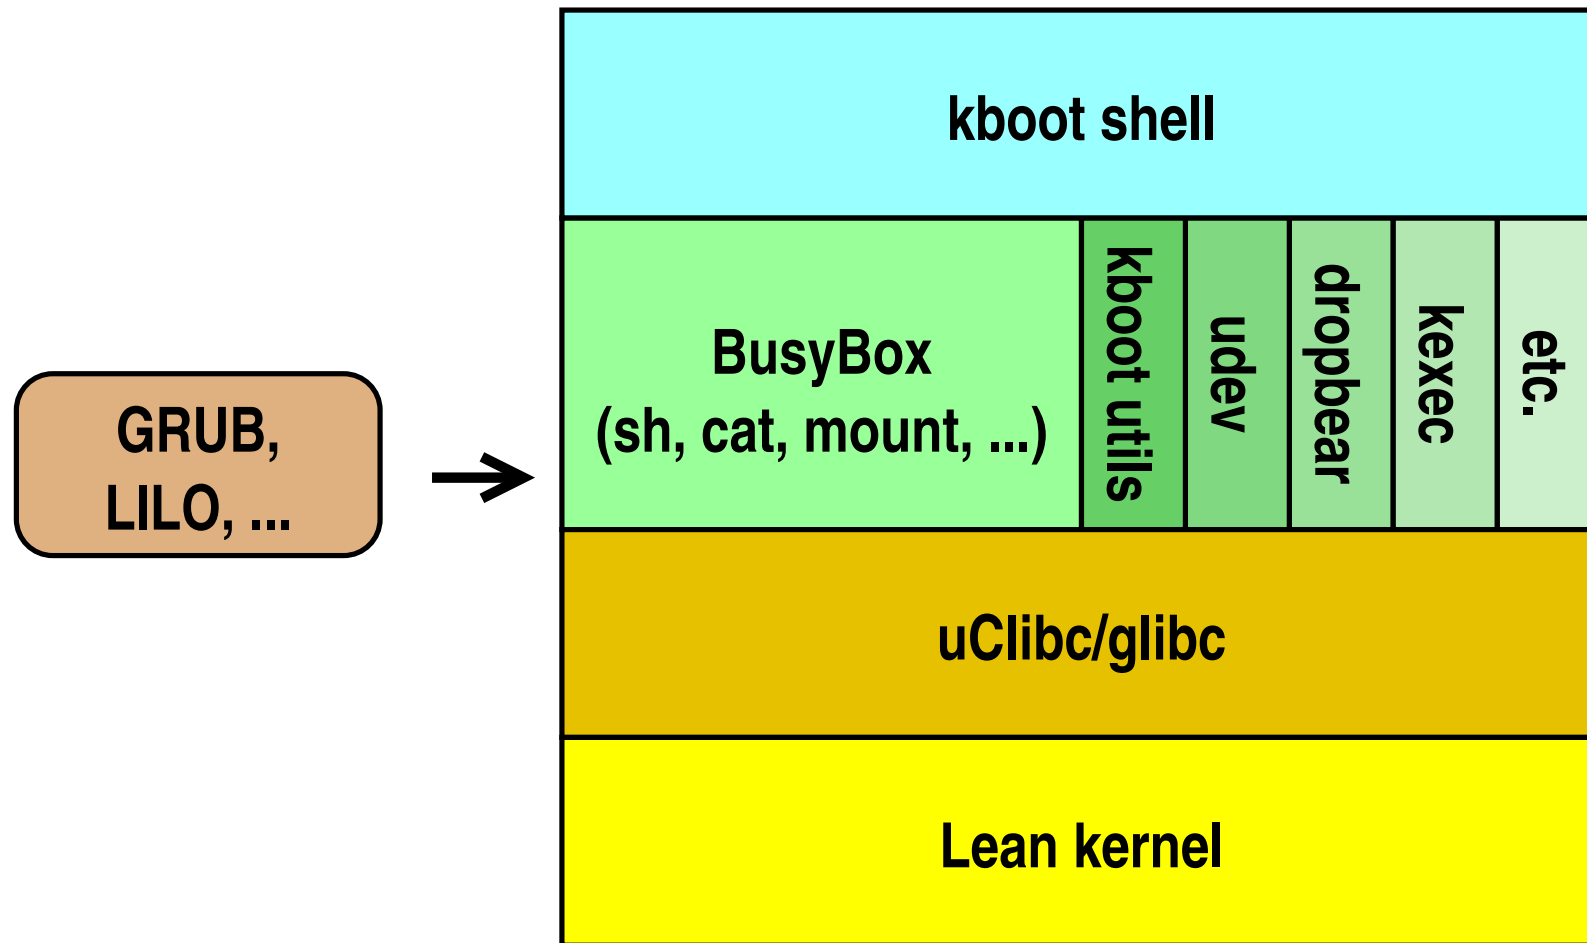


# Boot sequence

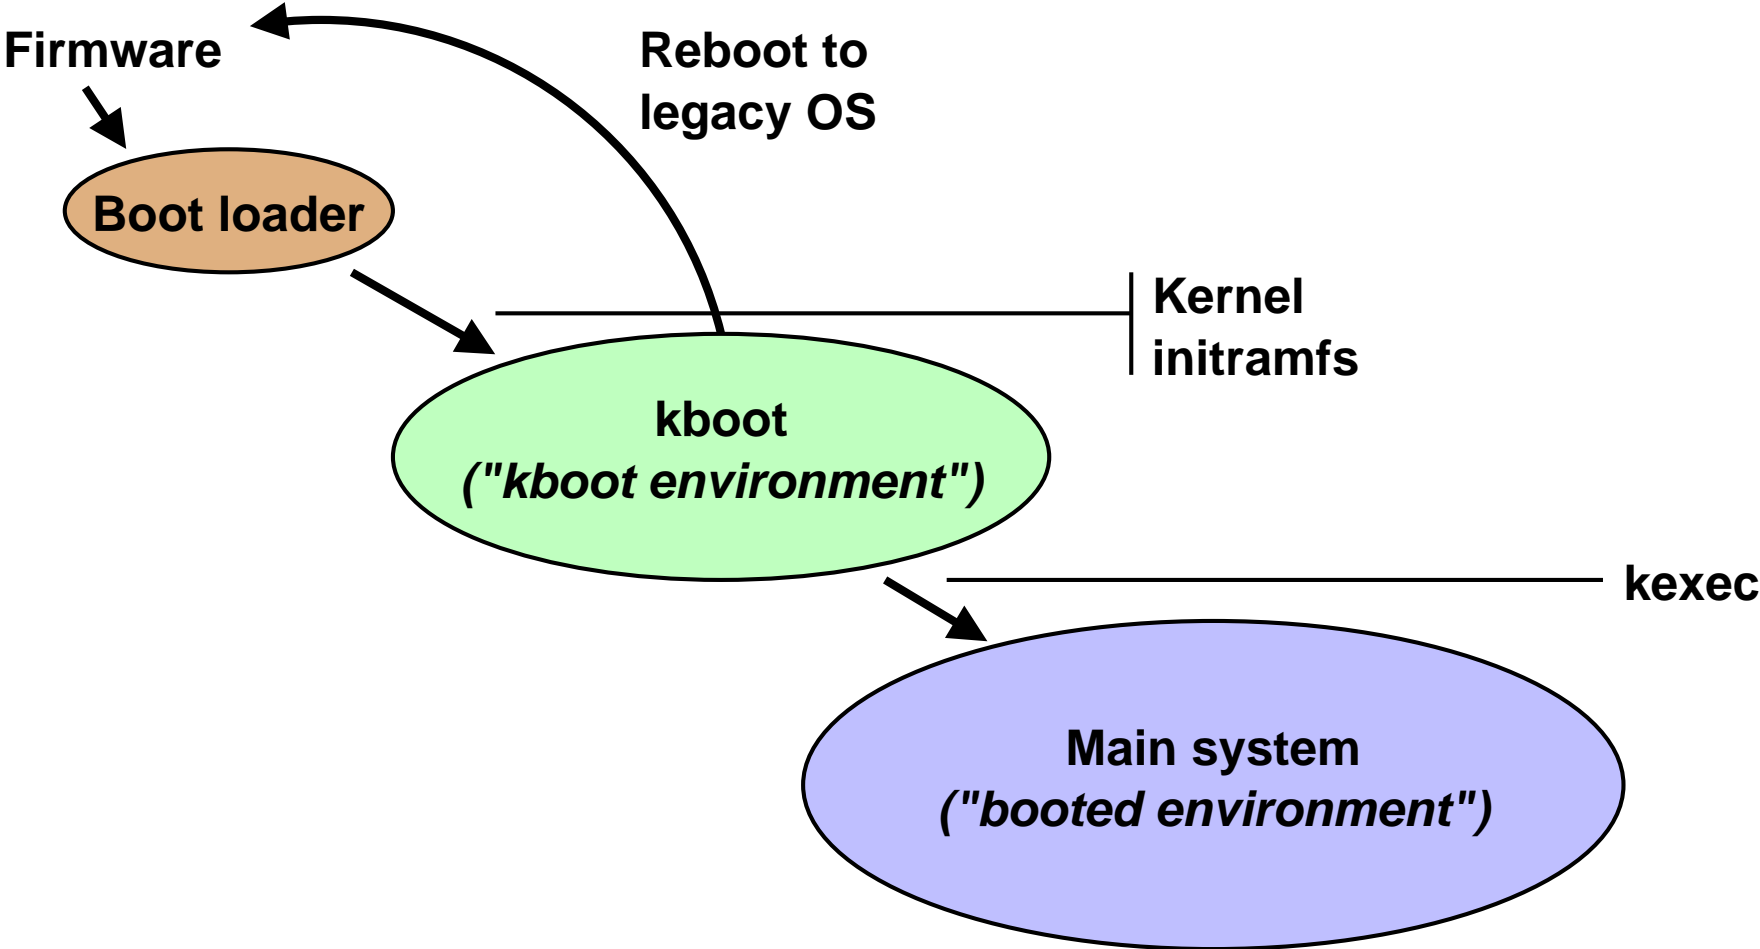

# kexec

By Eric Biederman.

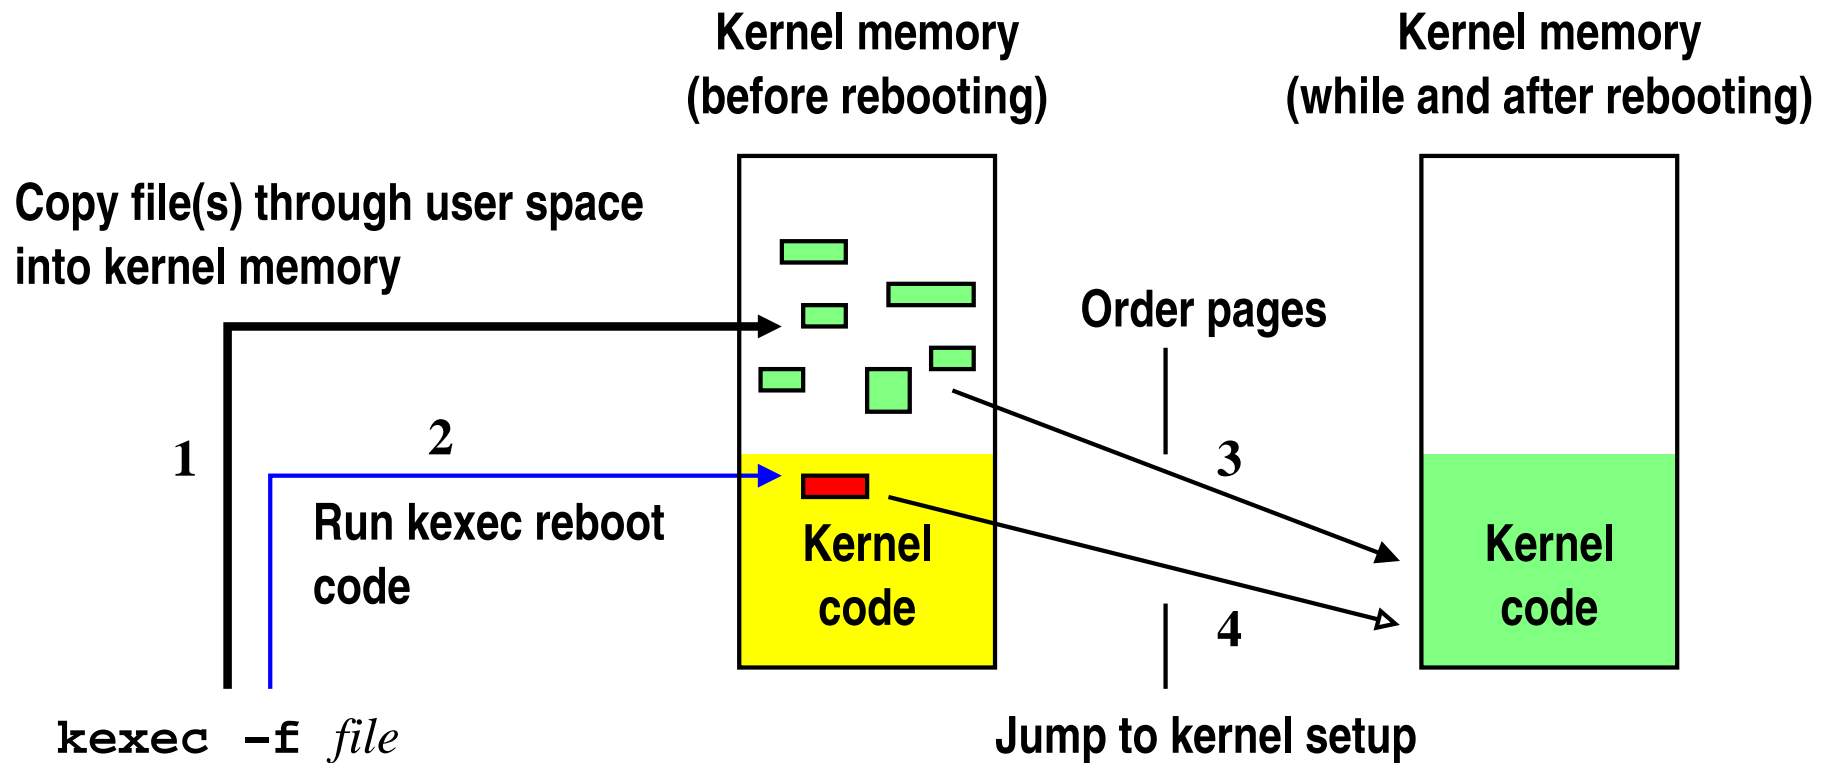



# kexec failures

Kexec fails if:

- Device drivers don't shut down properly
- Device drivers don't come back up properly
- Only the hardware/firmware can reset some devices


What this means for kboot deployment:

- There are many devices and drivers out there
  - Only comparably few people have used kexec so far
  - Kboot is (still) first “mass-market” application of kexec
- ⇒ kboot will reveal driver bugs

# kboot features

- Navigate with automounting
  - By path (enter booted environment), e.g., `/boot/bzImage-2.6.13.4`
  - By device, e.g., `/dev/hda2:/bzImage.26133`
  - NFS, e.g., `host.my.net:/stuff/kernel`
- Access (read) files on the network  
HTTP, FTP, TFTP (URL)
- Command execution
  - Local, mainly BusyBox
  - Chroot to booted environment
- Network configuration: DHCP, DNS
- Outbound and inbound SSH
- Timeouts, startup message, root device, initrd, keymap, ...

# Configuration sources

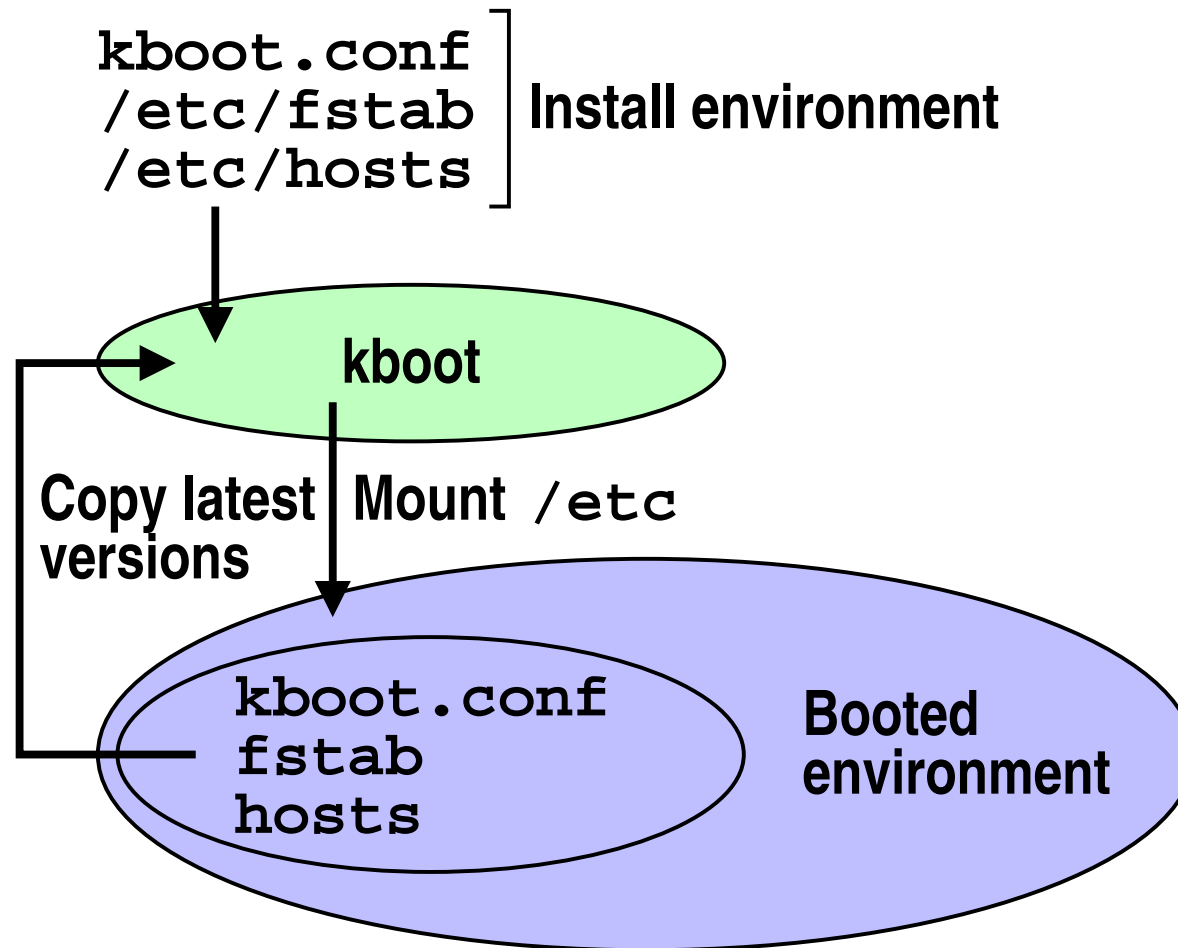

# Example session

*Configure the network, with DHCP*

*Mount the root file system of the booted environment*

*Update /etc/fstab*

*Update /etc/hosts*

```
kboot: cd /boot
```

```
/etc/fstab: /boot is on /dev/hda1
```

*Mount /dev/hda1 on /mnt/root/boot*

```
kboot /boot: ./bzImage initrd=http://www.mydoma.in/initrd.gz
```

*Download <http://www.mydoma.in/initrd.gz> (wget)*

*Look up [www.mydoma.in](http://www.mydoma.in) (/etc/hosts, DNS)*

*Run bzImage with kexec*

# Future work (1)

- Configuration
  - Clean up organization
    - E.g., build and installation should be separate
  - Use a configuration editor at build time, e.g., menuconfig
  - Persistent configuration changes at boot time
- Make extension easier
  - Allow “native” build (e.g., using glibc)
  - Simplify addition of user-provided packages
  - Converge with existing distribution
    - E.g. OpenEmbedded or ROCK Linux
- Write regression tests

# Future work (2)

- Support more environments
  - Other architectures than i386
    - “System Loader” (kboot\_s1, by IBM) already supports S390
    - x86\_64 sort of works
    - PlayStation 3 (PPC)
  - Include RAID, LVM, maybe SCP, SMB, ...  
(kboot\_s1 has EVMS)
  - Kernel modules
  - Direct booting of other operating systems
  - Multiple roots/file system hierarchies

# Future work (3)

- Introduce device scan result prediction  
(Preliminary work by Dipankar Sarma)
- User interface
  - Be less chatty (kernel, daemons), more consistent diagnostics
  - Add a menu
  - Maybe add a splash screen (PS3 ?)
  - Rewrite in C (e.g., for better meta-character handling)
- Find a maintainer

# Conclusion

- Proof of concept works
  - Not too big (can fit on a floppy)
  - A bit slow, but can be improved
- Extension is really easy
- First, stabilize and make prettier
- Then reap in the flexibility benefits

<http://kboot.sourceforge.net/>



Extra slides

# Path names (1)

Paths anywhere in the file system hierarchy:

- Relative to the current directory  
`./bzImage`
- Relative to the kboot root  
`//tmp/foo`
- Relative to the root of the booted environment  
`/boot/bzImage-2.6.13.4`

Kboot consults `/etc/fstab` to automount directories.

E.g., `cd /home/user/kernel/v2.6` may first mount `/`, then `/home`.

# Path names (2)

Paths on devices:

- With path to device file  
`/dev/hda2:/bzImage.26133`
- With name of device (under `/dev/`)  
`sda2:/subdir/file`
- Careful: `sda2` (and `/dev/sda2`)  
... will (in the future) try to boot a legacy OS from `sda2`

Navigation with relative paths inside file systems, e.g.

```
kboot: cd sda2:
```

```
kboot /dev/sda2://: cd subdir
```

```
kboot /dev/sda2:/subdir: _
```

# Path names (3)

Paths and files in the network:

- NFS (full navigation)  
`host.my.net:/stuff/kernel`
- HTTP (download individual files)  
`http://host.faraw.ay/kernels/bzImage`
- FTP  
Like HTTP
- TFTP  
Like FTP and HTTP

# Configuration files

Files read from `config/` at build time.

<code>kernel-config</code>	<code>.config</code> for the kernel
<code>fstab</code>	Data for automounting
<code>hosts</code>	Local hosts database
<code>passwd</code>	kboot user and password-based access
<code>authorized_keys</code>	Access without password
<code>ssh_host_{rsa,dsa}_key</code> , <code>dropbear_{rsa,dss}_host_key</code>	“Identity” of the kboot environment
<code>kboot.conf</code>	Configuration variables
<code>message</code>	Greeting message
<code>language.bkeymap</code>	Keyboard layout

Unified interactive configuration of system capabilities.

# Configuration variables

Very similar to LILO:

<code>authorized_keys=</code> <i>path_to_file</i>	Access SSH without a password
<code>default=</code> <i>command</i>	Command for <code>[Enter]</code> or timeout
<code>delay=</code> <i>seconds</i>	First input delay (short)
<code>initrd=</code> <i>path_to_file</i>	Initial RAM disk or RAM FS
<code>message=</code> <i>path_to_file</i>	Message file
<code>mount_rw=</code> <i>true_or_false</i>	Automount read-only or read-write
<code>restricted=</code> <i>true_or_false</i>	Only allow predefined commands
<code>root=</code> <i>path_to_file</i>	Root file system
<code>timeout=</code> <i>seconds</i>	General input delay (long)

All other variables are treated as labels/macros, e.g.,

```
my_kernel="/boot/bzImage-2.6.13.1 root=/dev/sda7"
```

# Configuration sources (1)

- Basic capabilities set at build time  
E.g. whether to include DHCP support
- Configuration files on initramfs of kboot environment
  - Files from kboot's `config/` directory  
E.g. `kboot.conf`
  - Files from build host  
E.g. `/etc/fstab`
- Files copied from booted environment  
E.g. updates for the above files
- Manual settings and overrides  
E.g. `root=` or `initrd=` settings